


RVPR80-D

4-10-2024

Build-To Sheet

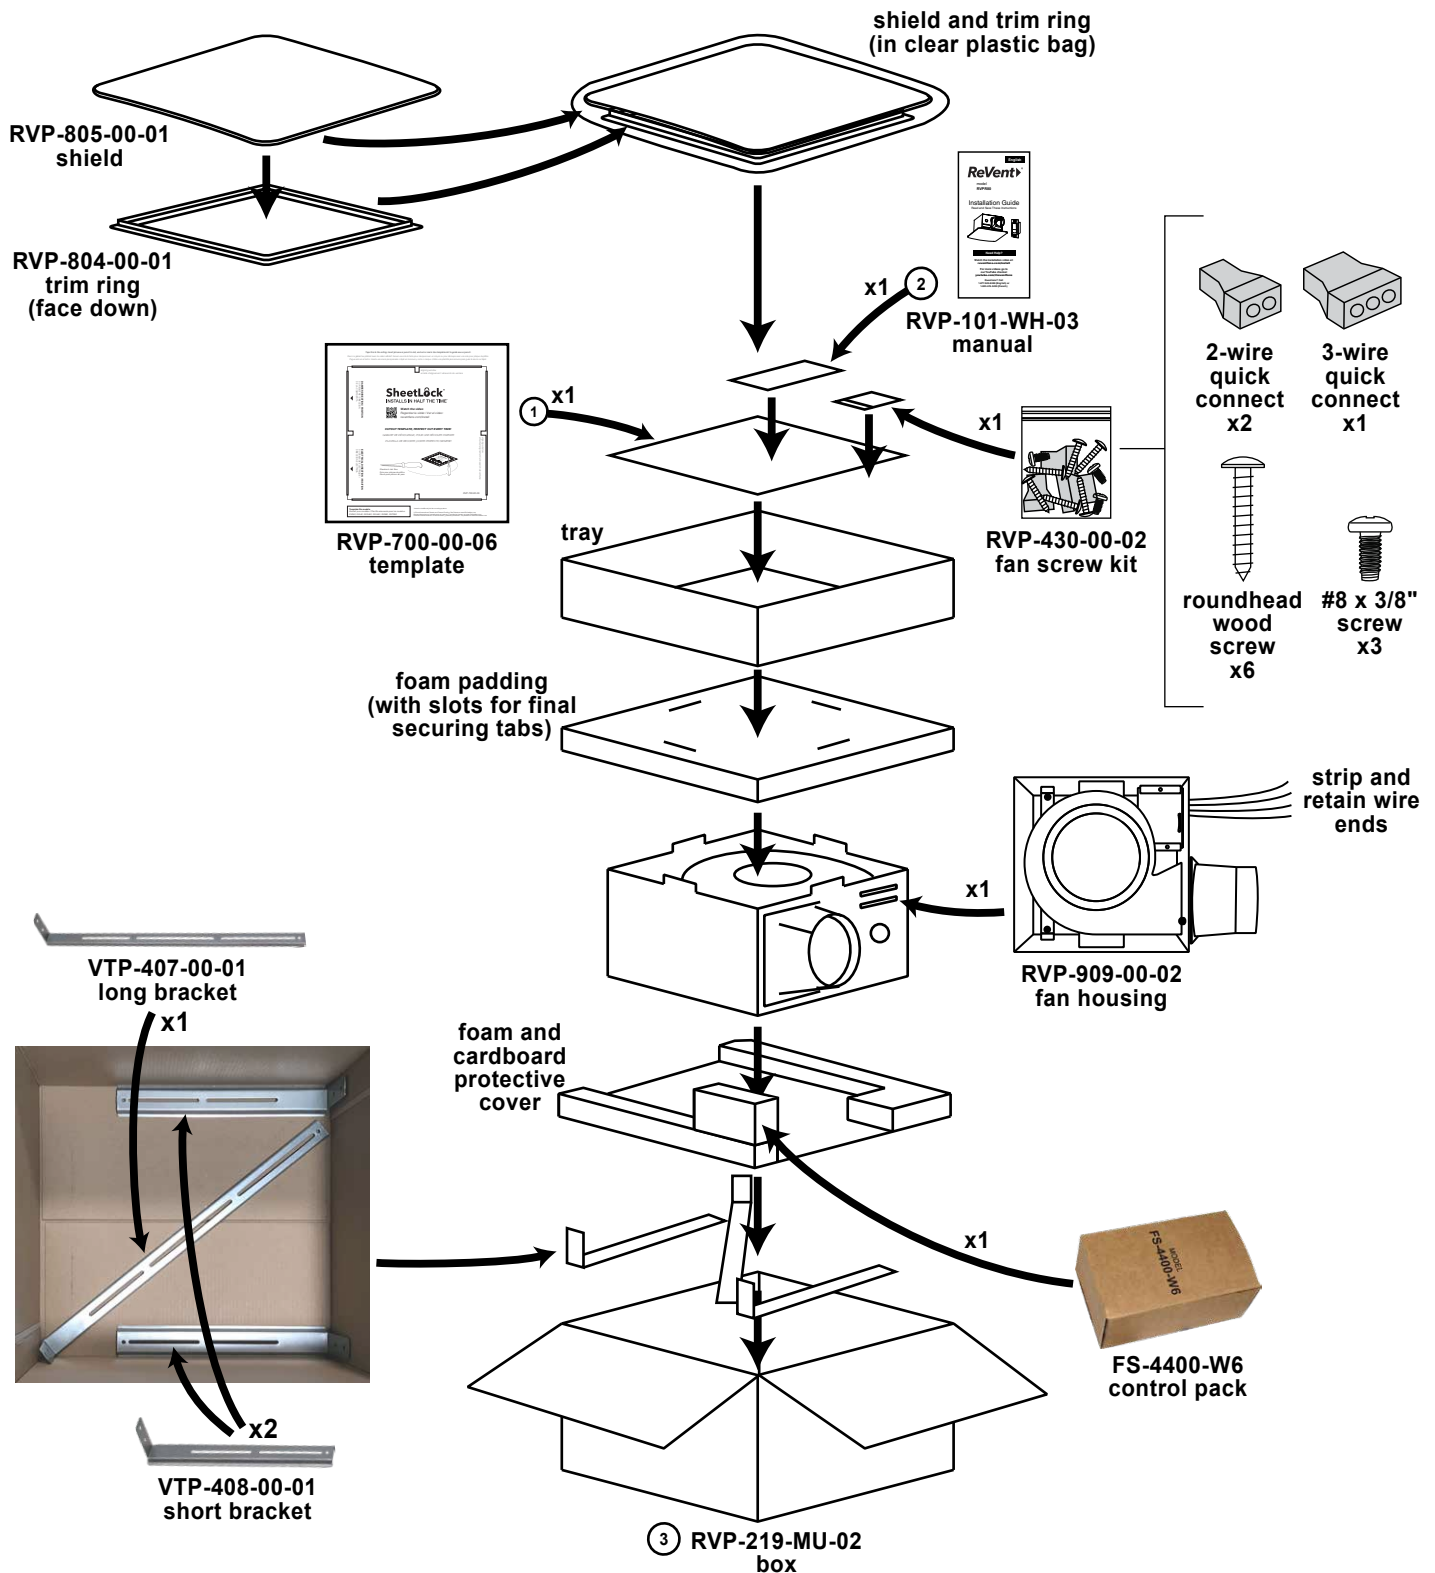

1: ReVent_80CFM_template_031424.ai

2: RVPR80-D_manual_041024.ai


3: RVPR80-D_box_032824.ai

RVPR80-D



RVP-219-MU-02
box
(shown closed and sealed)

FS-4400-W6

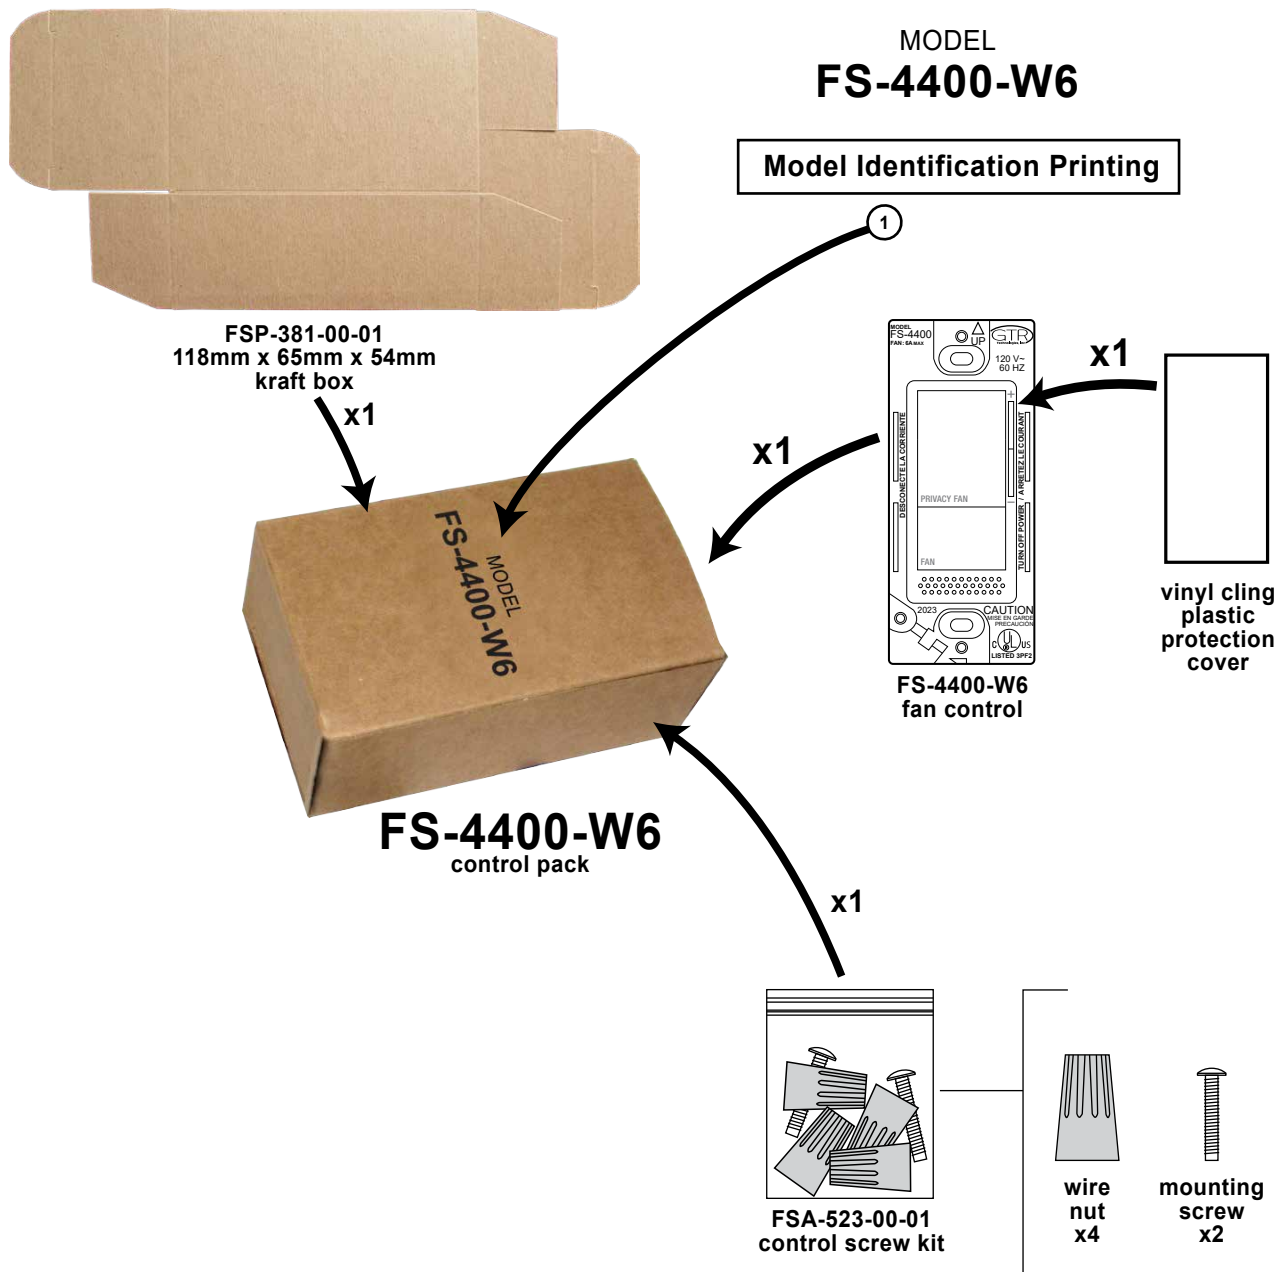


FS-4400-W6

MODEL
FS-4400
FAN: 6A MAX

+

Model Identification Printing

1

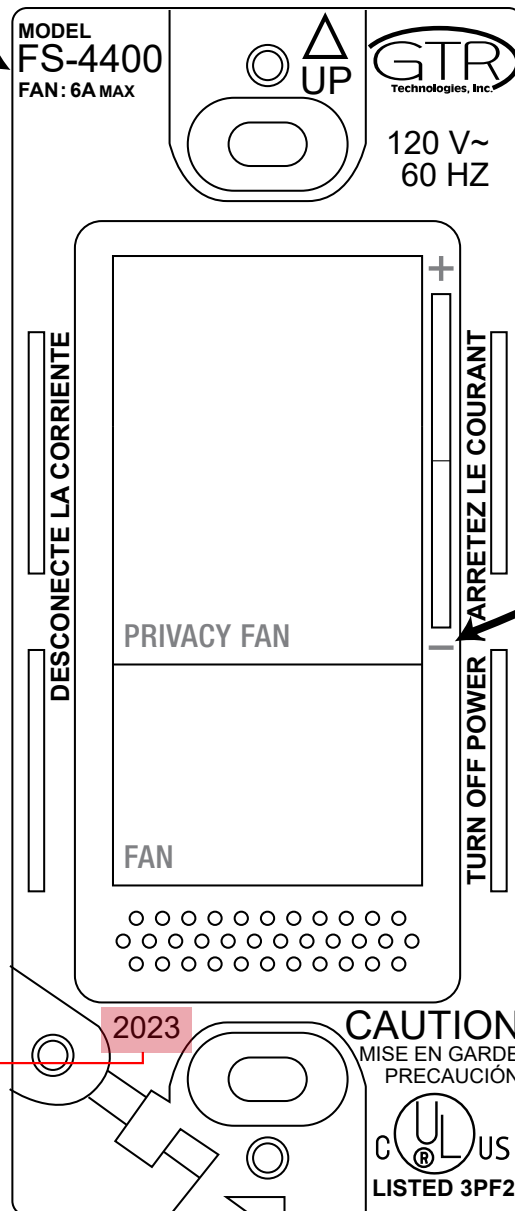

PRIVACY FAN

-

FAN

Button Printing

2

Date Code (YYWW)

2023

CAUTION
MISE EN GARDE
PRECAUCIÓN

UL US
LISTED 3PF2

FS-4400-W6



ReVent® FS-4400-W6
product of GTR Technologies Inc.
USA and International Patents and
Patents Pending. See Patents at
www.ReVentfans.com
Electrical Input: 120 volts @ 60Hz
Maximum Fan Load: 6 Amps
**Must Be Mounted Inside A Code
Approved Electrical Outlet Box**



FAN
POWER (HOT)
NEUTRAL

RVP-909-00-02

Label Placement

Date Code (YY-MM)

ReVent VENTILATION FAN
VENTILADOR


MODEL	V	Hz	A	W	CFM	SONE	DATE
RVPR80	120	60	0.19	20	80	0.8	20-09

• DISCONNECT POWER AT SERVICE ENTRANCE BEFORE CLEANING OR SERVICING
 • SUITABLE FOR CEILING INSTALLATION OVER TUB OR SHOWER
 • SUITABLE FOR WALL INSTALLATION IN INTERIOR WALL
 • NOT FOR USE IN COOKING AREA
 • THERMALLY PROTECTED
 • SEE INSTALLATION INSTRUCTIONS
 • DESCONECTE LA ALIMENTACIÓN EN LA ENTRADA DE SERVICIOS ANTES DE EMPRENDER TAREAS DE LIMPIEZA O DE MANTENIMIENTO
 • APTO PARA INSTALAR POR ENCIMA DE LA BAÑERA O DUCHA
 • APTO PARA INSTALAR EN PAREDES INTERIORES
 • NO DEBE USARSE EN LA COCINA
 • POSEE PROTECCIÓN TÉRMICA
 • VER INSTRUCCIONES DE INSTALACIÓN


CONFORMS TO UL
 LISTED EQUIPMENT TO
 CSA STD. C222 No. 113

WARNING: Acceptable for use over a bathtub or shower when installed in a GFCI protected branch circuit.
CAUTION: To reduce the risk of injury to persons, install fan at least 2.5m (8.2') above the floor. To reduce risk of fire and to properly exhaust air, be sure to duct air outside. DO NOT vent exhaust air into spaces within walls or ceilings or into attics, crawl spaces, or garages.
ADVERTENCIA: apto para usar sobre una bañera o ducha cuando se instala en un circuito derivado, protegido por un interruptor diferencial (GFCI, por sus siglas en inglés). **PRECAUCIÓN:** para reducir el riesgo de lesiones personales, instale el ventilador al menos a 2.5 m (8.2 ft) sobre el piso. Para reducir el riesgo de incendio y para extraer adecuadamente el aire, asegúrese de canalizar el aire hacia el exterior. NO ventile el aire de escape en espacios entre paredes, bajo techos, en áticos, en sótanos o en garajes.

GTR Technologies Inc.



RVP-829-BR-01
4" damper cover

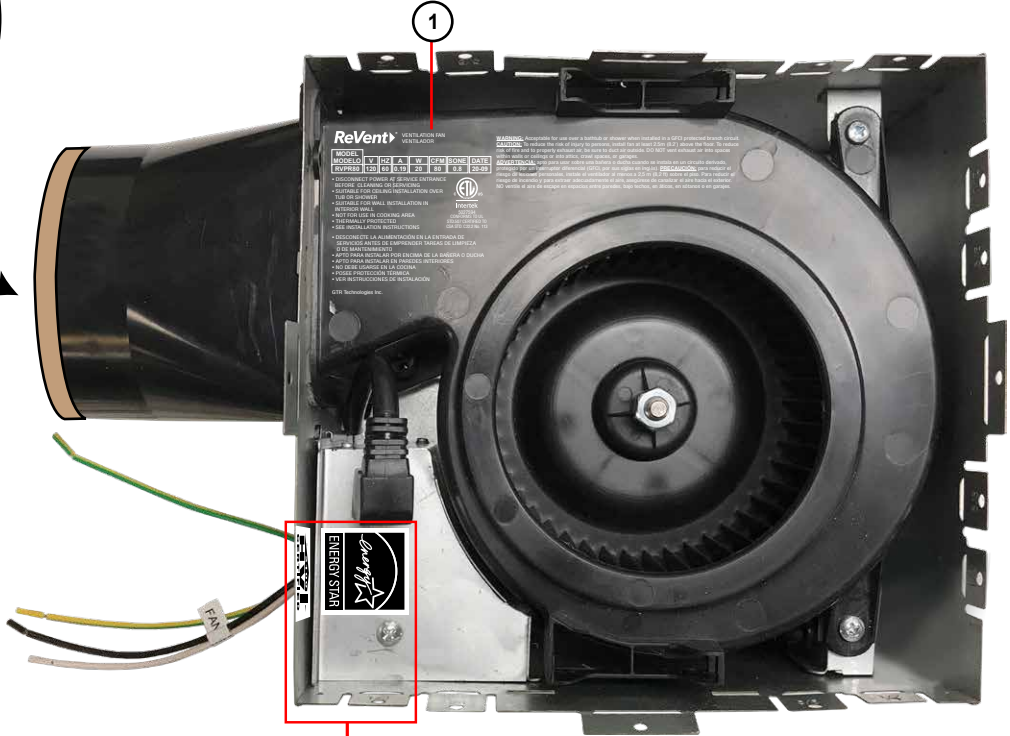

2



3



1: RVPR80-D_laser-printing_041024.ai

2: hvi_label_120318.ai

3: energy_star_label_120318.ai

RVP-909-00-02

Label Placement (bottom of motor)

Date Code (YY-MM)

CAUTION: This Motor APB21-4T should be used with housing RVXX80 only.


ATTENTION : Ce moteur APB21-4T doit être utilisé uniquement avec le boîtier RVXX80

PRECAUCIÓN: Este Motor APB21-4T deberá utilizarse solo con la cubierta RVXX80.

120 V 60 Hz
20 W 4T
Insulation A / Isolant A
3.2 μ F/250 V
Date : 20-09

APB21-4T

black/noir/negro black
 /noir
 /negro
red/rouge/rojo 135°C /blanc
 /blanco



REV LOG

REV DATE	MODEL/PART NO.	DISCRIPTION
3/14/2024	--	Original build
3/28/2024	RVP-101-WH-02	Updated manual (changed phrasing of 1/d in Safety Information) (page 1)
	RVP-219-MU-02	Updated box (added QR code linked to THD website, color change, switch design) (pages 1-2)
4/10/2024	RVP-101-WH-03	Updated manual (sones changed to 0.8, W changed to 20) (page 1)
	RVP-909-00-02	Updated laser printing (sones changed to 0.8) (page 6)